

УСТАНОВОЧНЫЙ ДИСПЛЕЙ ДЛЯ СЕРИЙ IEF И IEFB

Удобный доступ к показаниям счетчиков IEF и IEFB




A-IEF-FDSP-RM




A-IEF-IDSP-RM



IEF-HN-PG
A-IEF-VLV-BR

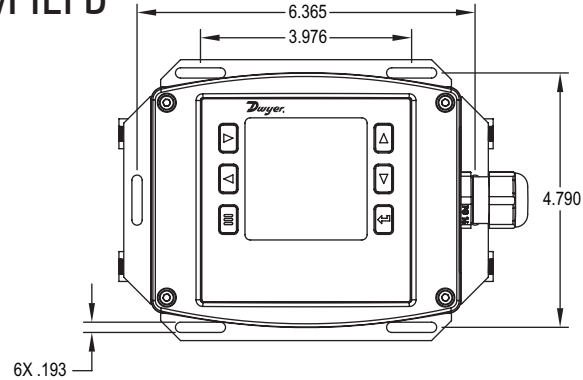

A-IEF-FDSP-RM



A-IEF can be installed almost anywhere near

- Full functional display can be used to set up the IEF/IEFB and adjust the settings if it is installed in a hard-to-reach location.
- Indicator display makes it convenient to read process values if the meter is inaccessible.
- Varying cable lengths of up to 100 ft (30 m) allows for flexible installation on a wall or pipe mount.
- Easy to install and wire in the field.

- Mechanical rooms with a small footprint
- Hard-to-reach piping
- Boilers and chillers
- Chilled water
- Condenser water

- Make-up water
- Heating water
- Boiler feed water
- Steam condensate

. Окружающий воздух: от ° до °Хранение: от ° до °	
кран :ЖК графика, диагональ	Подсветка только у полнофункционального дисплея
Enclosure Material Housing: B3BUERDWHGGLHEDVWDRLE	
Enclosure Rating: IP68	
Electrical Connection: 5HPREONWHUPLQEOEFNVSWPDD	
Mounting: DOORUSLSHPRW	
Mounting Orientation: ULHWDLRQ Бec: gr	
Соответствие стандартам : CE	

A-IEF-IDSP-RM	Индикаторный ЖК дисплей
A-IEF-FDSP-RM	Полнофункциональный ЖК дисплей
ПРИ А ЕЖ СТИ	
Модель	писание
A-IEF-CBL-50	Пленум кабель 15.2 м

Modbus® is a registered trademark of Schneider Automation, Inc.

Indicators, Electromagnetic, Thermal Energy Meter /
 Transmitters, Electromagnetic, Remote Display